



The maximum riser height shall be 7 3/4 inches. The tolerance between the largest and smallest riser height or between the largest and smallest tread depth shall not exceed 3/8 inch in any flight of stairs. The greatest winder tread depth at the 12 inch walk line within any flight of stairs shall not exceed the smallest by more than 3/8 inch measured at a right angle to the tread's leading edge.

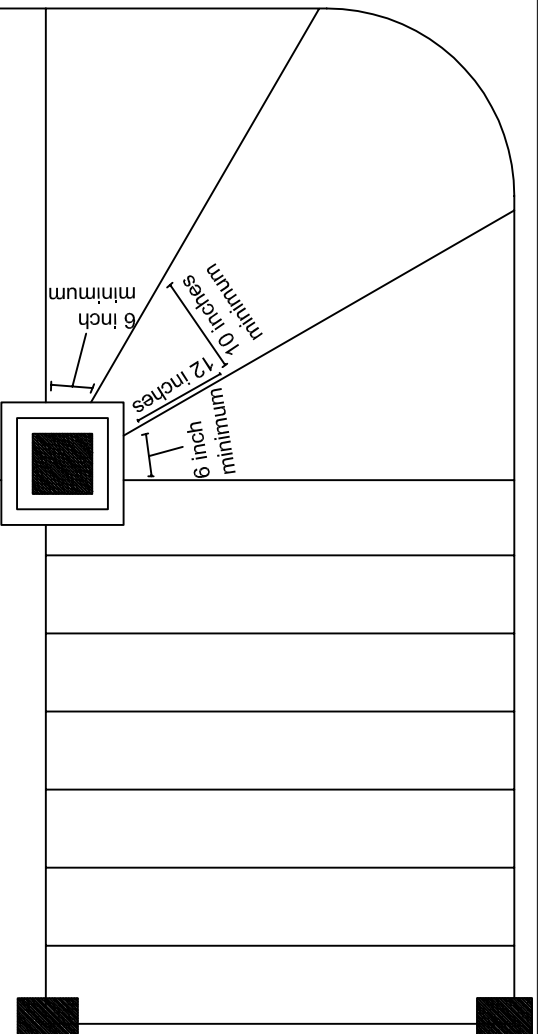

RESIDENTIAL WINDER STAIR DETAILS

DOWN

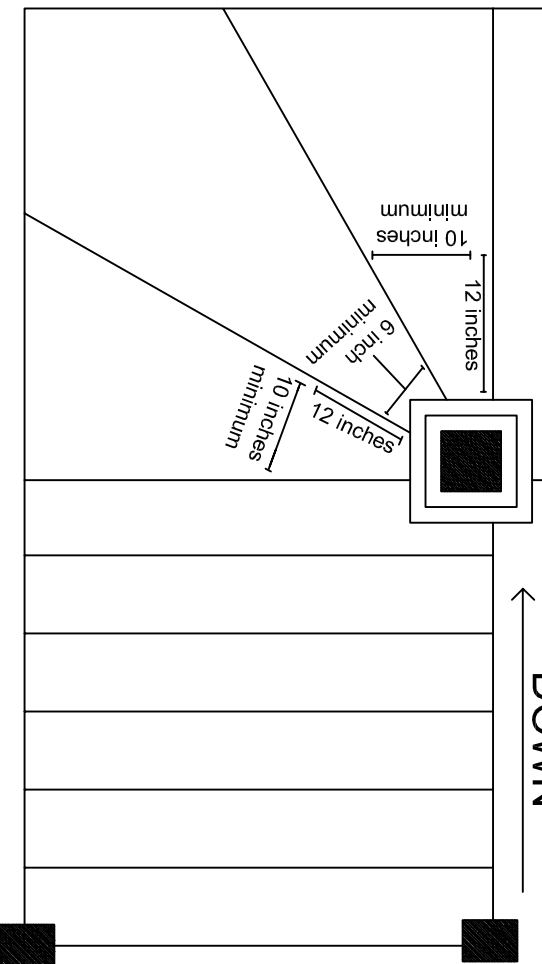

Winder treads shall have a minimum tread depth 10 inches measured at a right angle to the tread's leading edge at a point 12 inches from the side where the treads are narrower. The minimum winder tread depth shall be 6 inches. A nosing not less than 3/4 inch but not more than 1 1/4 inches shall be provided on stairways with solid risers where the tread depth is less than 11 inches.